


## RFID READER

# TBS SWIPE SQ80

TBS SWIPE SQ80 authenticates classic RFID cards. Add it as card reader to your access control solution, or connect it to the TBS Biometric System to equip access points where the customer prefers a low-cost reader instead of the high security of biometric readers.



- Multi-tech RFID reader:  
MIFARE UL/Classic/DESFire  
LEGIC Prime/Advant
- Connected to any third party controller via RS485 (OSDP) or Wiegand
- Connected to TBS CONTROLLER SMART+ via RS485 (OSDP), up to 4x SWIPE to one controller
- IP65 weather protection
- Reader Mode (no write mode)
- Compact Flush and Wall Mount Design
- 5 Year Warranty

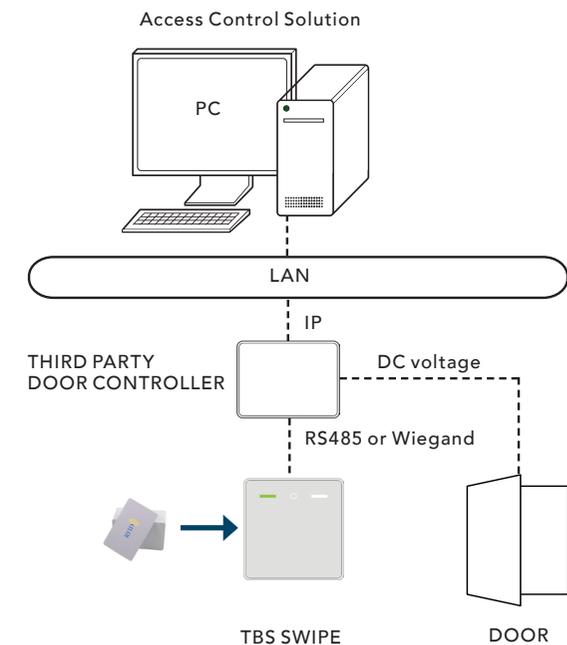




# TBS SWIPE SQ80

## Dimensions



## Architecture when connected to TBS Biometric System

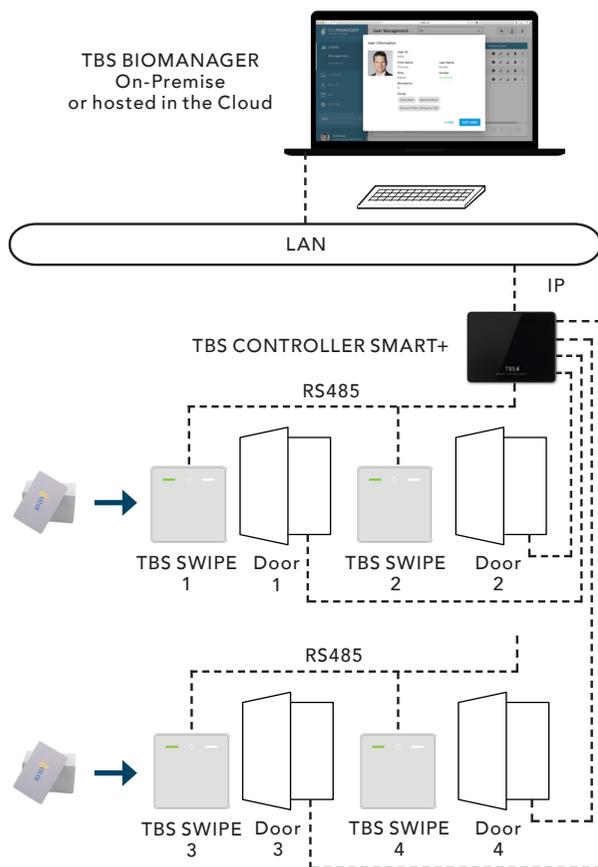

## Technical Specifications

Operating Frequency	13.56 MHz: ISO14443 types A & B, ISO15693
RFID / NFC	HF (13.56 MHz): LEGIC Prime/Advant, Mifare UL/Classic/DESFire
Connectivity	OSDP (v2.2) via RS485, Wiegand
Reading Distance	RFID: up to 60 mm (depending on environment and transponder) Up to 10m with a Bluetooth smartphone
Signalling	Visual signalling: Multi-color LED
Data Protection	AES128 (secured communication between reader & controller)
Tamper Switch	Magnetic tamper detection
Housing Material	Metal frame and glass front, potted housing White front (optional dark grey), silver frame
Certifications	CE/RED, FCC, UKCA, IC, REACH, RoHS-III Weather protection IP65
Mounting	Wall or flush mount (distance ring included), indoor and outdoor
Environment	Operating temperature -20°C to 60°C
Power Supply	6 to 28 VDC
Dimensions	H x W x D = 86 x 86 x 8.3 mm (FM; depth of WM = 18)